

DIGITAL
TEMPERATURE
CONTROLLER

CN - 40

DIN SIZE 48×48mm



■ FEATURES

- DIN PACKAGE
- PID AUTO TUNING
- Low cost
- 4 digits LED (PV and SV)
- Sensor break protection
- 100 to 240V AC power supply
- Various event functions

■ Standard Specification

Input	Thermocouple	K,J,T,E,R,N,S , W5Re/W26Re
	R.T.D	Pt100 DIN JPt100
Setting method	By front (up,down) keys	
Indication	PV	4digits 7segments LED green Letter 10mm height
	SV	4digits 7segments LED red Letter 7mm height
	OUTPUT/Event monitor	LED red : OUT / LED red : AL
Control output	PID Autotuning	Proportional band 0.1-300.0% Setting span
		Integral time 0-3600seconds
		Derivative time 0-3600seconds
		Cycle time 1-120seconds
	ON/OFF	Control sensitivity 0- Setting span
	Relay contact	250V AC 3A(Load resistance) 1a contact
	SSR drive	0/12V DC upper 600Ω
Sampling time		0.5sec
Setting and Indicating accuracy		Thermocouple : $\pm (0.5\%+1\text{digit})$ of process value or 4 ,either of bigger numeral value is taken.
		R.T.D : $\pm (0.5\%+1\text{digit})$ of process value or 1.2 ,either of bigger numeral value is taken.
Memory Element		EEPROM
Voltage source		100V AC to 240V AC(50/60Hz)
Weight		less than 170g
Power Consumption		less than 10VA(240V AC)
Operation Condition		0 to 50 20 to 90%RH(under non-condensation)
Storage Condition		-25 to 70 5 to 95%RH(under non-condensation)
Other functions		Control mode changable, C/F chengable PV adjustable,Lock function by front keys
Event function	Kind of event	21 kinds(Refer to event modes)
	Relay contact	250V AC 3A(Load resistance) 1a contact



■ Ordering Information

CN - 40 □



Symbol	Output type
Non	Relay contact output
P	SSR drive voltage output

■ Wiring

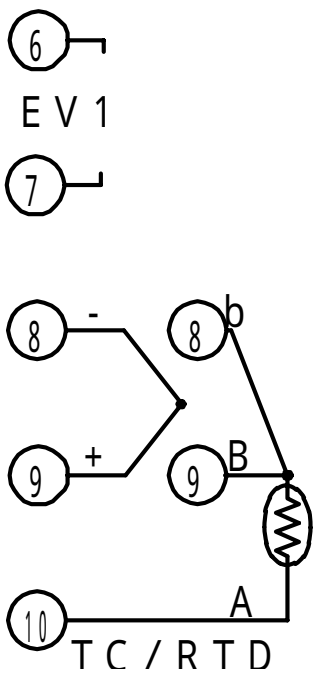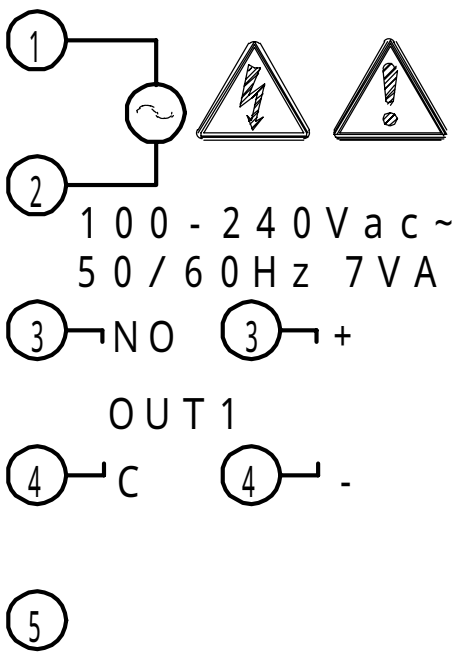

■ Dimensions

